



***ROLLER BAR HAY RAKES WITH THE STRENGTH
AND SIMPLICITY TO GO THE DISTANCE***

BERRIMA
ENGINEERING



V ROLLER BAR HAYRAKES

Australian designed and manufactured machines built strong for our tough conditions, delivering years of trouble free raking utilizing the most gentle raking action with all the flexibility you will ever need.

Years of experience

Berrima Engineering is a well known and respected name in the hay industry due to the quality products it has been producing over the last 20 years. Berrima hay rakes are the most robust, simple yet versatile machines and represent excellent value for money with unmatched re-sale value.

Sizes to suit your needs

The broad range covers all raking requirements from 8 and 16 metre raking widths, the biggest rollerbar rakes on the market. Longer baskets mean a greater basket angle with much better, gentler raking action.





OPERATE WITH EASE

With a simple and reliable control system, operating a Berrima hay rake is a breeze. Adjustment can be made on the go for raking width, basket angles, windrow width, basket height without leaving the tractor seat.



POWERFUL HYDRAULIC SPLITTERS

The Berrima hydraulic splitter opens up even more raking options with ability to rake 3 windrows into 1, 3 into 2 or ted a raked windrow.

Operation of the splitters raise and lower, turn on and off, is synchronized with the baskets. They can also be locked in the raised position and turned off when not in use.



SUPERIOR BASKET ADJUSTMENT

Aggressive basket pitch adjustment allows for the prevention of roping and makes light fluffy windrows for quick drying and allows you to rake heavy silage with ease.



V RAKING AT ITS BEST

The versatility in a Berrima Hay Rake is only limited to what the operator can think of. With other rake designs limited by fixed windrow width, raking width or raking angle. Berrima offers great adjustability on all these functions and combined with powerful windrow splitters here are just some of our rakes capabilities;

- + Bring two windrows into one.
- + Use the hydraulic splitters to bring three windrows into one.
- + Flick two windrows over onto dry ground.
- + Turn a raked row over for faster drying.
- + Offset rake to place windrow onto dry ground.
- + Use the hydraulic splitters to turn 3 windrows into two, placing them either side of the tractor wheels.
- + Ted and re-rake a windrow to speed up drying.
- + Ted a row with splitters for better drying.
- + Create a windrow width you need to suit your operation.



THE BR RANGE

DESIGNED TO SUIT YOUR NEEDS

The BR800 and BR1000 are designed for small to medium sized operations that are ideal for small paddocks and mowers. Their standard 2.4 metre transport width and 2 metre height allows the rake to be maneuvered between paddocks and along the road with ease. They represent great value and have the Berrima trademark quality, reliability and resale value.

CLEAN RAKING


The hydraulic driven baskets means the tynes don't touch the ground, preventing the collection of contaminants. The powerful hydraulics will allow raking of the heaviest of silage.

PERFECT WINDROWS

Create windrows your baler will love with the roller bar action. Square, even windrows at the needed width to create the perfect bale.

LIGHTING COVERED

All Berrima Hay rakes come standard with tail travel lights and a work light to light up your windrows during night operation.

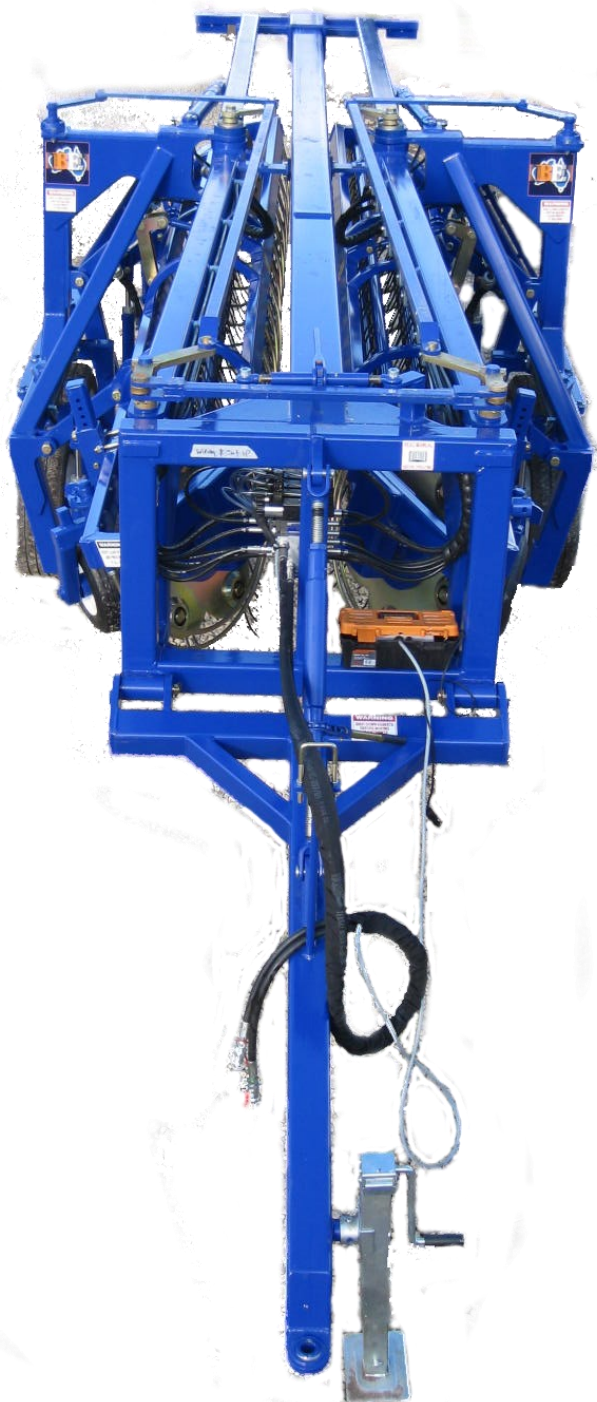



AWARD WINNING IDLER SYSTEM

With raking widths getting bigger and bigger, a design innovation needed. Longer tyne bars flex over the longer distance and can flex and fatigue.

The Berrima idler system was developed. Essentially has two smaller tyne bars joined through the idler system, allowing it to act as a singular, long tyne bar. This award winning design is implemented on the BRC12000.



THE BRC RANGE

The BRC model is designed with the BR principal but with increased options and flexibility for operating in adverse environments.

- + Equipped with heavy duty axles with large floatation tyres to glide over the roughest of paddocks.
- + Fitted with Canadian designed and manufactured Timbren rubber suspension to support and dampen against uneven ground to allow the baskets to float freely.
- + Easy height adjustment to precisely level and change the raking height of the baskets.
- + Heavy duty gauge wheels with simple height adjustment.
- + Standard basket shut off and lock out for individual basket use.



TOUGH DESIGN, EXCEPTIONAL RAKING

Power through thousands of acres of lucerne, challenging heavy silage and over the roughest terrain. The BRC range of roller-bar rakes has the versatility and strength to handle any crop on any terrain.

Choose the machine to suit your needs with our 10 metre and 12 metre models. These two models come with easy adjustments for every crop, narrow fold up for quick movement between fields and basket suspension to glide over the most demanding ground.



MODEL	BR800	BR1000	BR800C	BR1000C	BR1200C
RAKING WIDTH	0 - 8m /27ft	0 - 10m /33ft	0 - 8m /27ft	0 - 10m /33ft	0 - 12m /39ft
TRANSPORT WIDTH	2.4m/8ft	2.4m/8ft	2.4m/8ft	2.4m/8ft	2.5m/8.3ft
WINDROW WIDTH	0.5m/1.5ft - 3.5m/12ft	0.5m/1.5ft - 4.5m/15ft	0.5m/1.5ft - 3.5m/12ft	0.5m/1.5ft - 4.5m/15ft	0.5m/1.5ft - 5.5m/18ft
WEIGHT	2.4t	2.7t	2.5t	2.9t	3.6t
TRANSPORT LENGTH	6.5m/21.5ft	7.5m/25ft	6.5m/21.5ft	7.5m/25ft	8.5m/28ft
HEIGHT	2m/6.5ft	2m/6.5ft	2m/6.5ft	2m/6.5ft	2m/6.5ft
RAKING SPEED	8 - 16 km/h	8 - 16 km/h	8 - 16 km/h	8 - 16 km/h	8 - 16 km/h
TRANSPORT SPEED	Max. 50 km/h	Max. 50 km/h	Max. 50 km/h	Max. 50 km/h	Max. 50 km/h
TYNES/BASKET	220/320	290/430	220/320	290/430	360/520
HYDRAULIC REQUIREMENTS	30 L/m single remote	35 L/m single remote	30 L/m single remotes	35 L/m single remotes	40 L/m single remote
HYDRAULIC FUNCTIONS	5	5	5	5	5
TYRES	205/65/15 X 4	205/65/15 X 4	295/50/15 X 4	295/50/15 X 4	33/12.50/15 X 4
HYDRAULIC STEERING	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL
GAUGE WHEELS	OPTIONAL	OPTIONAL	4 STANDARD	4 STANDARD	6 STANDARD
HYDRAULIC SPLITTERS	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL
INDIVIDUAL BASKET SHUT OFF	OPTIONAL	OPTIONAL	STANDARD	STANDARD	STANDARD
TIMBREN RUBBER SUSPENSION	N/A	N/A	STANDARD	STANDARD	STANDARD
BASKET LIFT LOCK OUT	OPTIONAL	OPTIONAL	STANDARD	STANDARD	STANDARD

DEALER :

BERRIMA ENGINEERING

FOREST CREEK ROAD, DENILIQUIN NSW 2710

Ph 03 58824222

www.berrimahayrakes.com.au

